


성능곡선도 CMI 25 60Hz

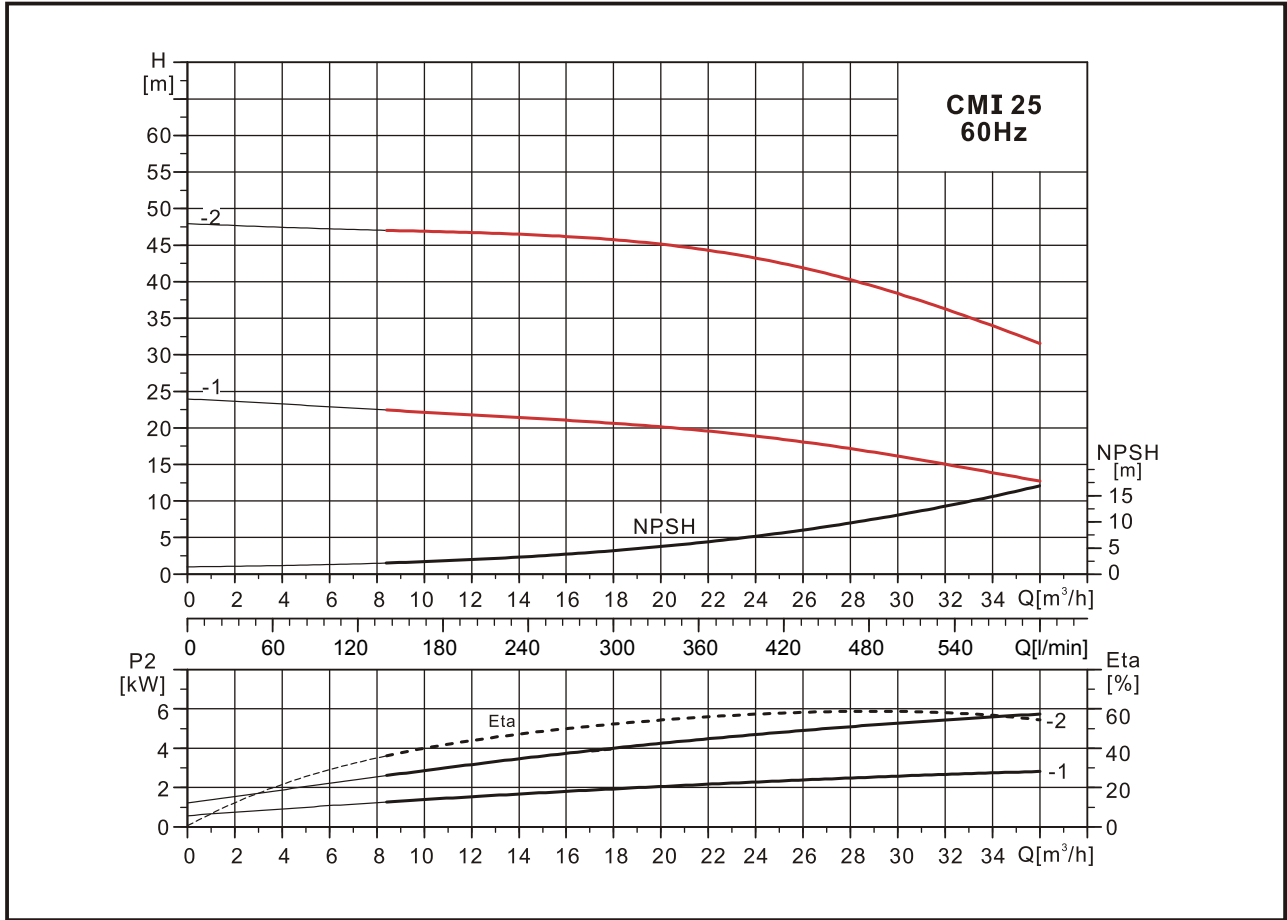


표준 사양

Model	P ₂ (kW) 출력	Q (m ³ /h)	H (m)														
			8	10	12	14	16	18	20	22	24	25	26	28	30	32	34
CMI 25-1	4.0		22.5	22	22	21.5	21	20.5	20	19	18.5	18	17.5	17	16	15	13
CMI 25-2	5.5		47.5	47.5	47	46.5	46	45.5	45	44	43	42	41	40	38	36	33


· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

외형도 60Hz

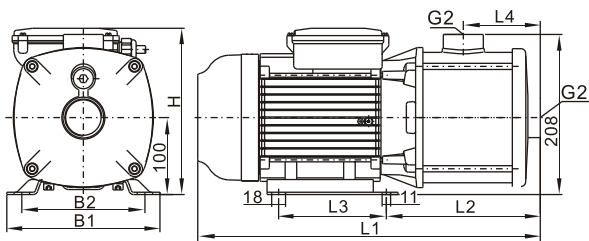

Model	사이즈 (mm)						
	B1	B2	L1	L2	L3	L4	H
CMI 25-1	199	160	510	235	140	100	260
CMI 25-2	228	190	560	288	140	100	296

성능곡선도 CMI 25 50Hz

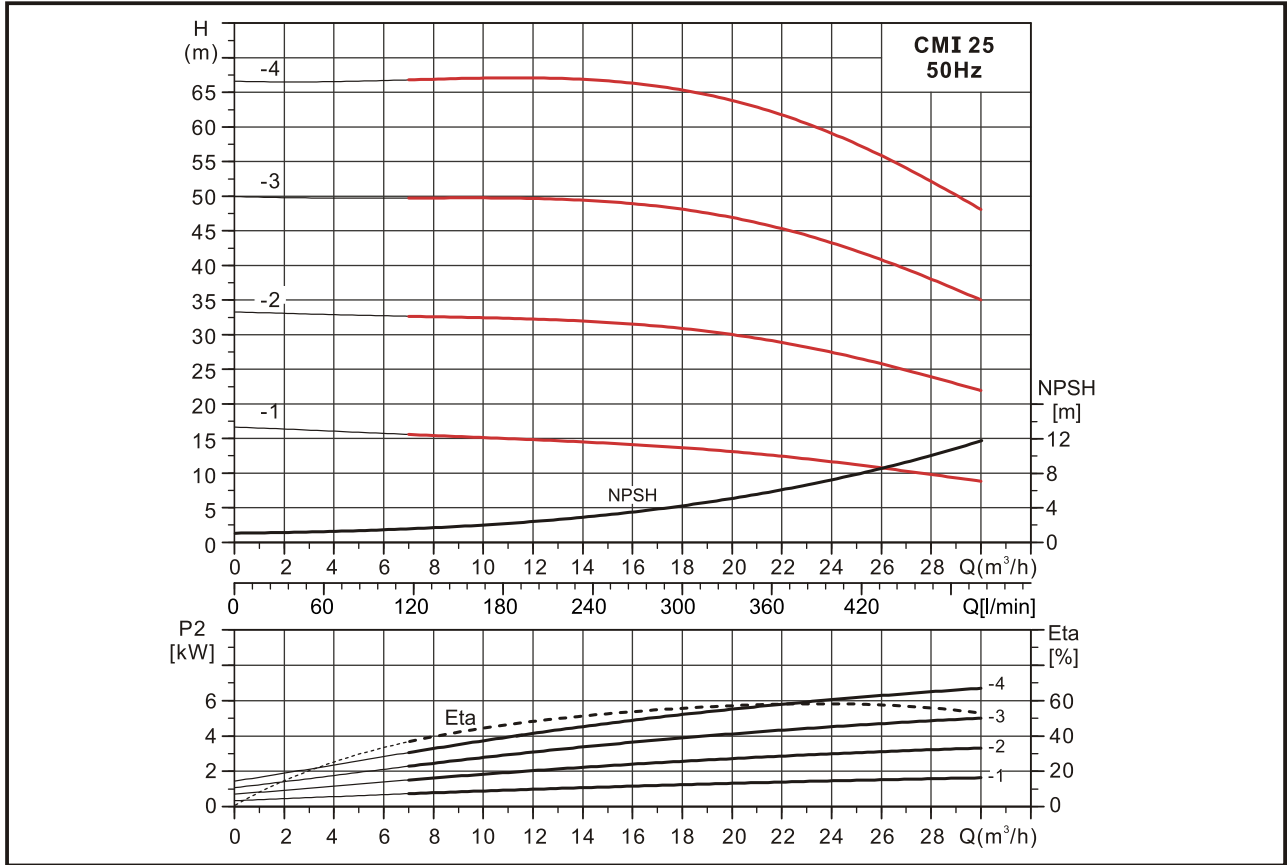


표준 사양

Model	P ₂ (kW) 출력	Q (m ³ /h)	8	10	12	14	16	18	20	22	24	26	28
CMI 25-1(T)	2.2	H (m)	15.5	15	15	14.5	14	13.5	13	12	11.5	11	10
CMI 25-2T	4.0		33	32.5	32	31.5	31	30.5	30	28	27	26	24
CMI 25-3T	5.5		50	50	50	49	48	47	46	45	43	41	38
CMI 25-4T	7.5		66	66	66	66	66	65	64	62	58	56	52

· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

외형도 50Hz

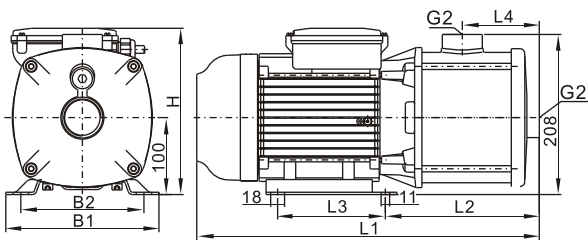

Model	사이즈 (mm)							단상 H	삼상 H	무게 (kg)
	B1	B2	L1	L2	L3	L4				
CMI 25-1(T)	199	160	448	200	140	100	244	217	21	
CMI 25-2T	199	160	510	235	140	100	—	260	29	
CMI 25-3T	228	190	560	235	140	100	—	295	35	
CMI 25-4T	228	190	620	288	140	130	—	295	38	