


## 성능곡선도 CMI 5 60Hz

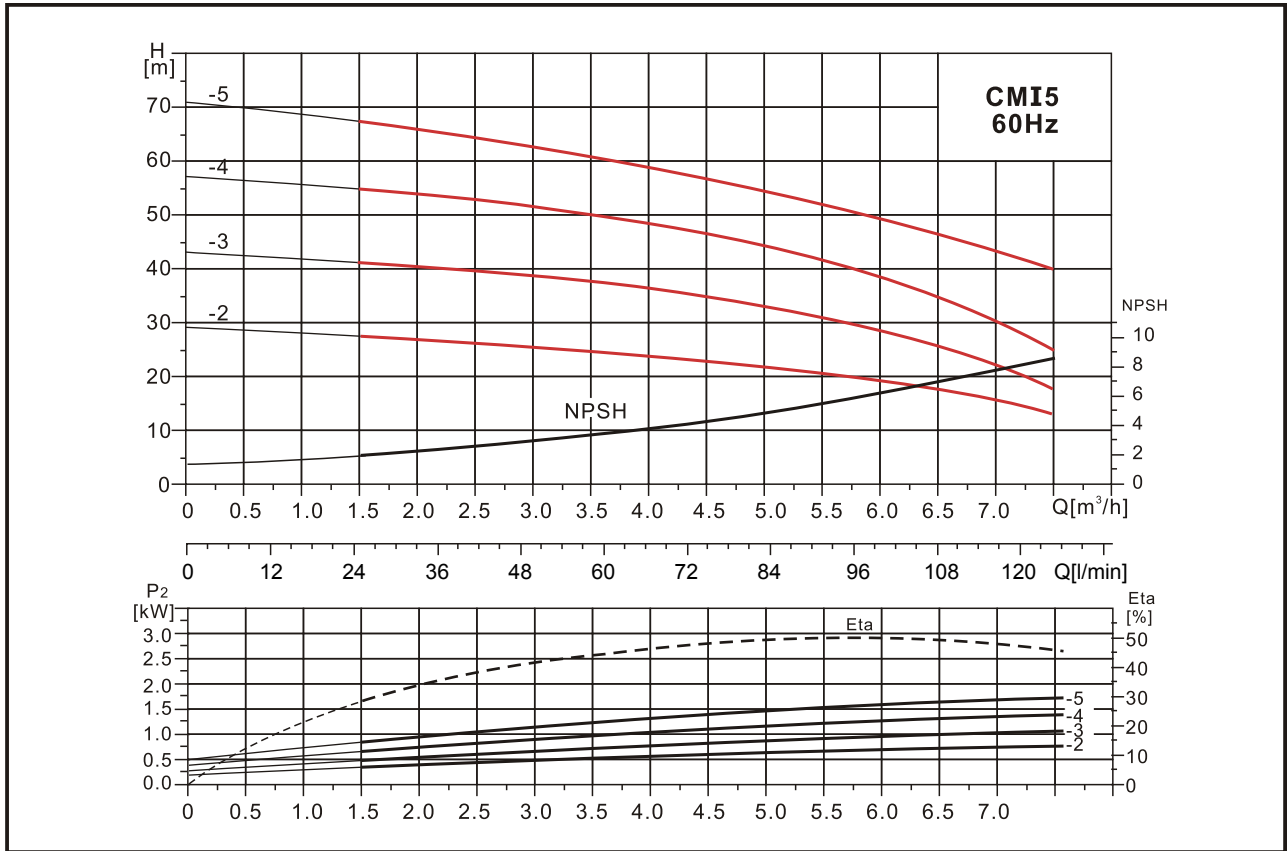


## 표준 사양

Model	P <sub>2</sub> (kW) 출력	Q (m <sup>3</sup> /h)	H (m)														
			0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5
CMI5-2	0.75	H (m)	28	27.5	27	26	25.5	25	24.5	24	23	22	21.5	19	17	15	13
CMI5-3	1.0		42	41	40	39	38.5	38	37	36	33.5	33	31.5	29	26	22	18
CMI5-4	1.0		56	55	53.5	52	51.5	51	49.5	48	46	44	41	39	35	29	24
CMI5-5	1.85		70	69	63	65	64	63	61.5	60	57	55	51	48	43	36	30


· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

## 외형도 60Hz

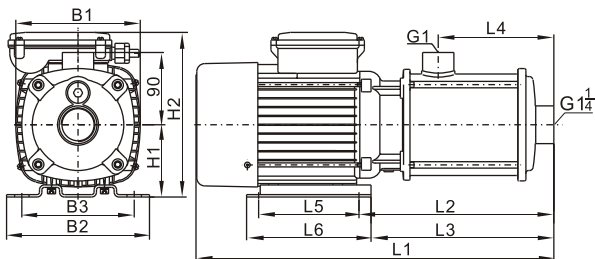

Model	사이즈 (mm)															무게 (kg)
	B1	B2	B3	H1	단상		삼상		L2	L3	L4	L5	L6			
					H2	L1	H2	L1								
CMI5-2(T)	140	158	125	75	170	326	188	326	131	107	72	96	155	10.5		
CMI5-3(T)	140	158	125	75	182	326	188	326	131	107	72	96	155	11.5		
CMI5-4(T)	140	158	125	75	182	344	188	344	149	125	90	96	155	12.5		
CMI5-5(T)	155	178	140	90	244	426	211	410	207	192	108	125	155	17		

### 성능곡선도 CMI 5 50Hz

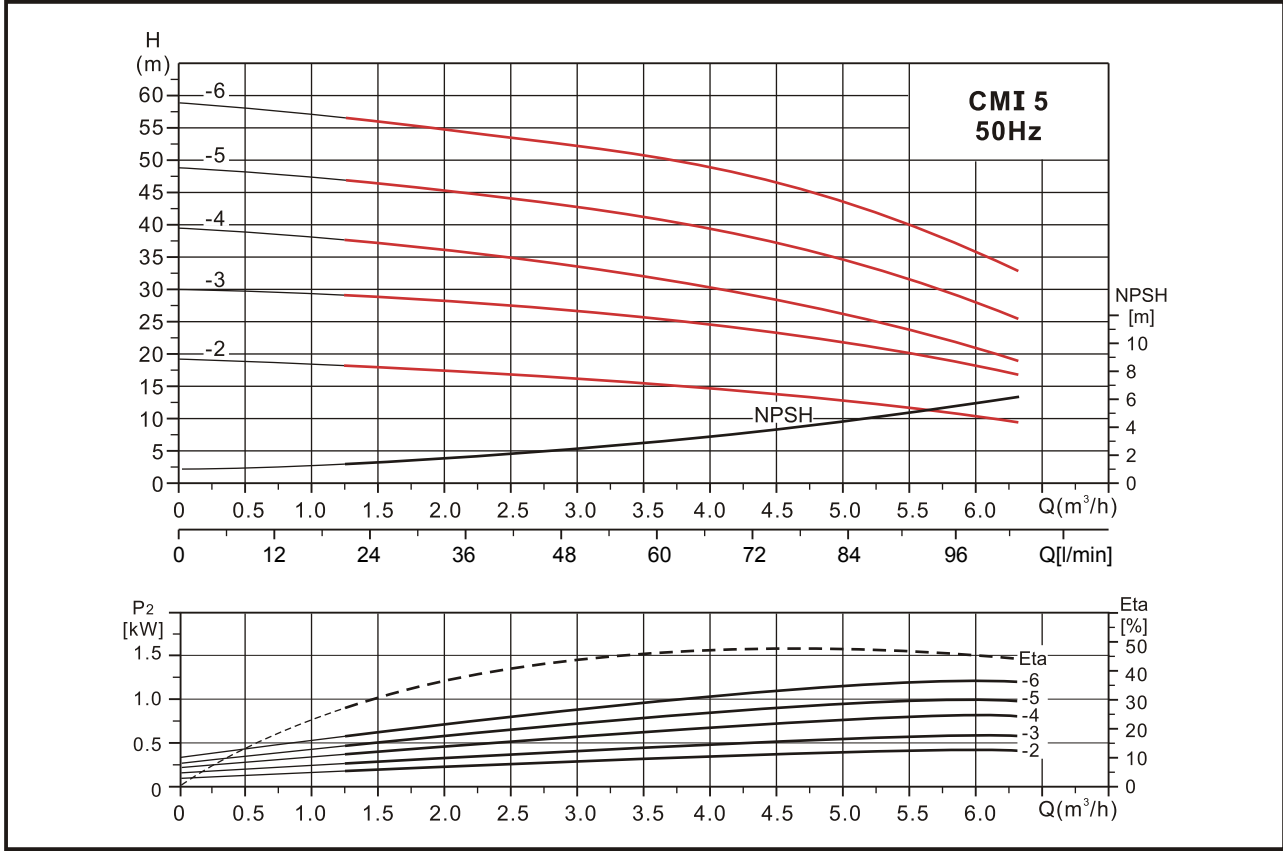


### 표준 사양

Model	P <sub>2</sub> (kW) 출력	Q (m <sup>3</sup> /h)	H (m)										
			1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
CMI5-2	0.37		18.5	18	17.5	17	16	15.5	15	13.5	13	11	10
CMI5-3	0.55		29	28.5	28	27	26.5	25.5	25	23	22	20	18
CMI5-4	0.75		38	37	36	34	33.5	32	30	28	27	24	20
CMI5-5	1.0		47	46	45	44	42.5	41	40	36	35	32	27
CMI5-6	1.3		56.5	55	54	53	52.5	51	49	45	44	42	36

· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

### 외형도 50Hz

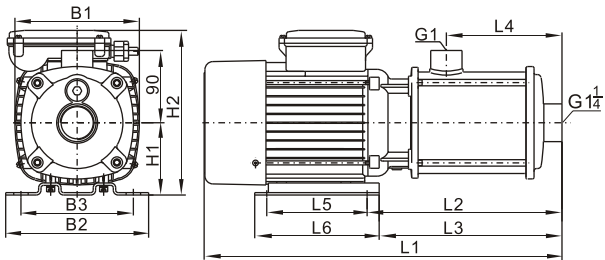

Model	사이즈 (mm)												무게 (kg)	
	B1	B2	B3	H1	단상		삼상		L2	L3	L4	L5		L6
					H2	L1	H2	L1						
CMI5-2(T)	140	158	125	75	170	318	174	318	131	113	72	96	136	8.0
CMI5-3(T)	140	158	125	75	170	347	174	318	131	113	72	96	136	10
CMI5-4(T)	140	158	125	75	182	362	188	362	149	125	90	96	155	11.5
CMI5-5(T)	140	158	125	75	182	380	188	380	167	143	108	96	155	12.5
CMI5-6(T)	155	178	140	90	209	446	211	446	243	228	144	125	155	15