


## 성능곡선도 CMI 8 60Hz

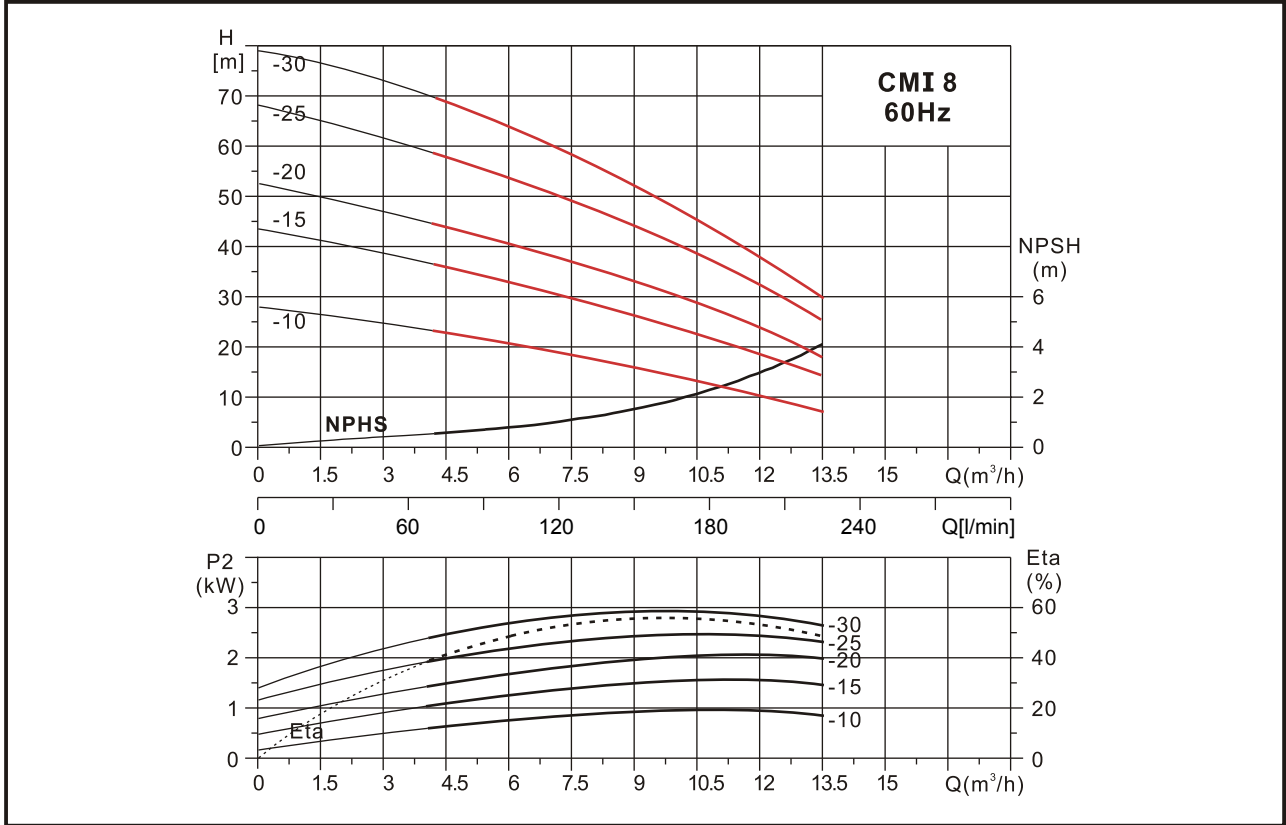


## 표준 사양

Model	P <sub>2</sub> (kW) 출력	Q (m <sup>3</sup> /h)	4.0	5.0	6.0	7.0	8.0	9.0	10	12
CMI8-10	1.0	H (m)	22	21	20	19	18	16	14	12
CMI8-15	1.5		34	33	32	30	28	26	24	19
CMI8-20	1.85		45	42	40	38	36	32	28	24
CMI8-25	2.2		58	55	52	50	46	42	38	31
CMI8-30	3.0		72	70	67	62	58	52	47	35


· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

## 외형도 60Hz

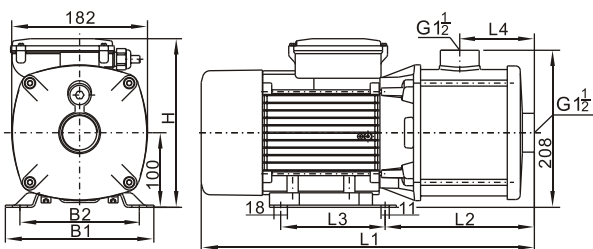

Model	사이즈 (mm)											
	단상					삼상					L2	L4
	B1	B2	L1	L3	H	B1	B2	L1	L3	H		
CMI8-10(T)	158	125	377	96	209	158	125	377	96	212	185	100
CMI8-15(T)	158	125	408	96	232	158	125	408	96	217	200	100
CMI8-20(T)	199	160	449	140	244	199	160	408	96	217	200	100
CMI8-25(T)	199	160	449	140	244	199	160	408	96	217	200	100
CMI8-30(T)	—	—	—	—	—	—	—	469	140	212	200	100

## 성능곡선도 CMI 8 50Hz

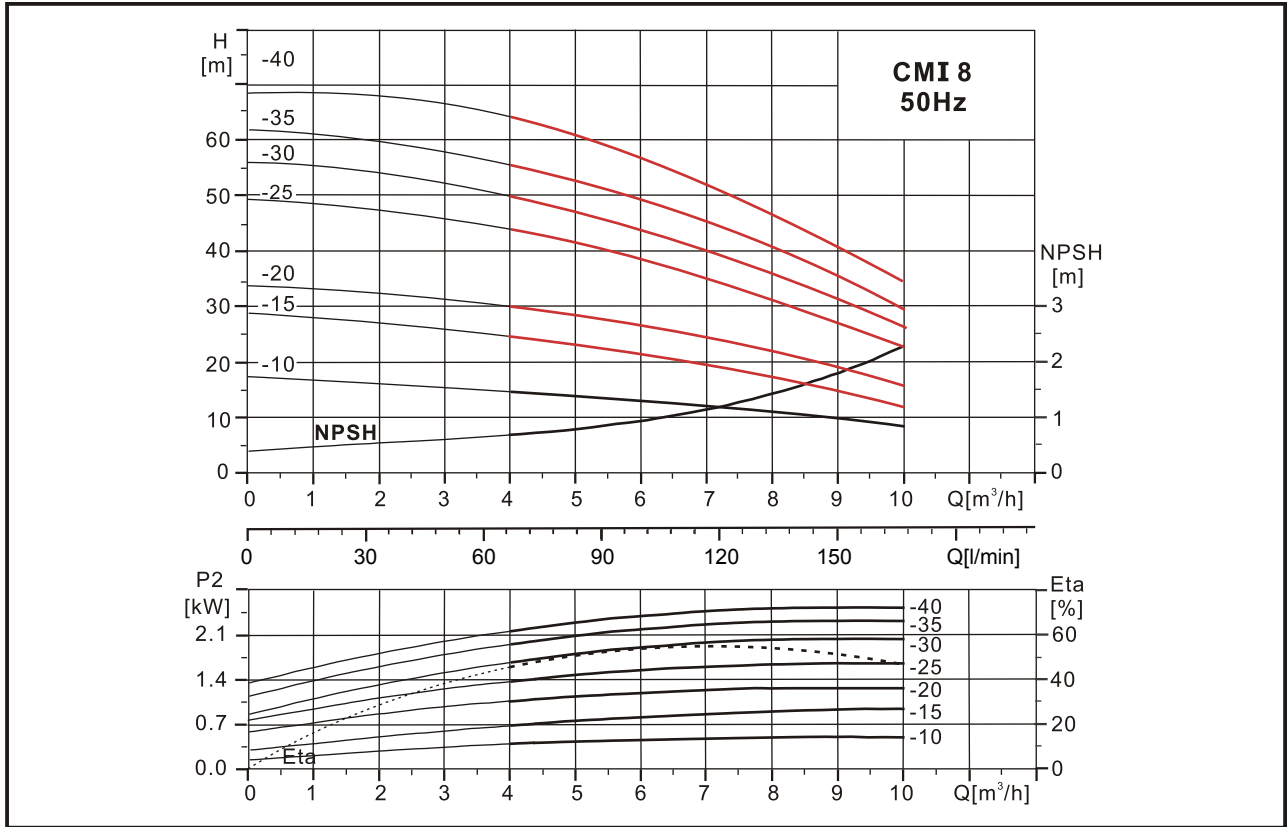


## 표준 사양

Model	P <sub>2</sub> (kW) 출력	Q (m³/h)	4.0	5.0	6.0	7.0	8.0	9.0	10
CMI8-10	0.55	H (m)	15	14	13	12.5	12	9	8
CMI8-15	0.75		25	23	22	21	20	14	12
CMI8-20	1.0		32	29	27	25	24	21	17
CMI8-25	1.5		43	40	38	34	27	25	20
CMI8-30	1.85		50	46	44	40	36	30	26
CMI8-35	2.2		56	51	48	44	43	35	28
CMI8-40	2.2		65	57.5	57	50	48	42	34

· 단상 220V는 표시없음, (T)는 삼상 220V/380V/440V

## 외형도 50Hz

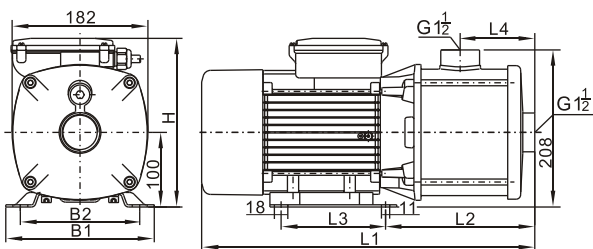

Model	사이즈 (mm)										무게 (kg)		
	단상					삼상							
	B1	B2	L1	L3	H	B1	B2	L1	L3	H		L2	L4
CMI8-10(T)	158	125	377	96	206	158	125	377	96	212	185	100	10
CMI8-15(T)	158	125	377	96	206	158	125	377	96	212	185	100	11
CMI8-20(T)	158	125	377	96	206	158	125	377	96	212	185	100	13
CMI8-25(T)	158	125	408	96	232	158	125	408	96	217	200	100	16
CMI8-30(T)	199	160	449	140	244	158	125	408	96	217	200	100	21
CMI8-35(T)	199	160	479	140	244	158	125	438	96	217	230	130	22
CMI8-40(T)	199	160	479	140	244	158	125	438	96	217	230	130	23